



## RL-420 ROTARY LABELER



### High-speed, precise, flexible labeling

Designed for the application of a film or paper pressure sensitive label to virtually any shape container, the WLS RL-420 rotary labeler combines a robust modular platform with air-actuated top hold, and motor driven product rotation. This design ensures years of troublefree operation at highest efficiency levels with minimal maintenance requirements. The RL-420 comes with an enhanced zero access guarding package, meeting the most stringent safety standards.

The RL-420 can be configured with a variety of options such as single or redundant servomotor-driven label heads, label coding or inspection including serialized codes, precise container orientation, sidesert or topsert placement, integrated feeding systems such as a cup placer and 21CFR Part 11 or CE compliance.

#### FEATURES AND BENEFITS

- Motor-driven product platforms
- cGMP compliant construction
- Synchronized servomotor-driven feedscrew, machine and conveyor drives
- Multi-shape container capability
- Tool-less quick changeover
- Boom mounted, user-friendly and password protected HMI
- Positive track and reject


## TYPICAL PRODUCT SPECIFICATIONS

<b>Turret Diameter</b>	16.5" (420 mm)		
<b>Platform</b>	6	9	12
<b>Driven Platform Option</b>	x	x	x
<b>Max. Speed (Cpm)* *Dependent on label size</b>	240	350	480
<b>Max. Container Size (Major Axis/Width or Diameter)</b>	6" (152 mm)	4" (101 mm)	3" (76 mm)
<b>Max. Container Size (Minor Axis/Depth or Diameter)</b>	4" (101 mm)		

<b>Max Container Height</b>	10" (254 mm)
<b>Label Head</b>	X-3 or X-5
<b>Container Type</b>	Glass, metal or plastic - Round, oval, rectangular or compound angles
<b>Label Accuracy Range Vertical Position</b>	<i>Vertical Position:</i> Dependent on label roll slitting accuracy <i>Skew:</i> Dependent on sidewall vertical accuracy <i>Placement:</i> Dependent on application

## CONFIGURATION

Top view

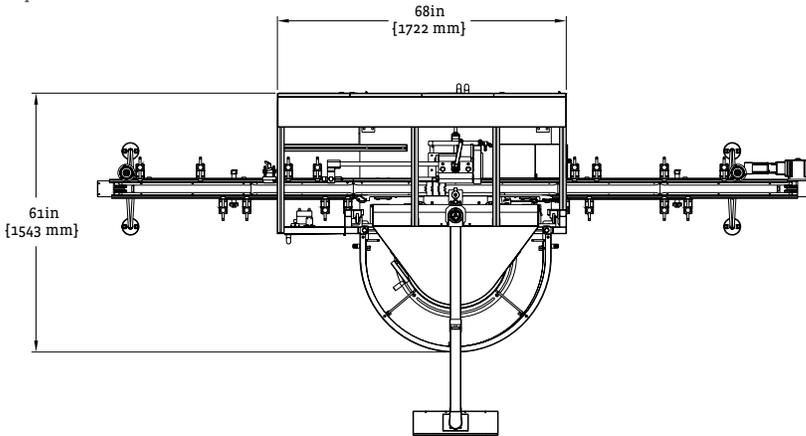

*WLS Sales and Service assures responsive and comprehensive technical assistance in solving your labeling application problems, servicing your WLS equipment, and providing a full line of compatible systems supplies.*

## OPTIONS

- Color-marked container tooling
- Recessed product platforms (for compound angle containers)
- Motorized container height adjustment
- Container orienting prior to labeling
- Vacuum soft-reject star wheel
- Integration of all major code printing (thermal ink jet, thermal ribbon and laser) and vision inspection brands
- Serialization capable (for label code or association of container "alias" code)
- Interceptor (for rejected label removal prior to application)
- OOOE (Overall Equipment Effectiveness) and other custom HMI screens
- Data collection
- Remote Ethernet access (for long distance diagnostics)
- 21 CFR Part 11 compliance
- FAT/DDS/IQOQ documentation
- UL, seismic or CE field evaluation